
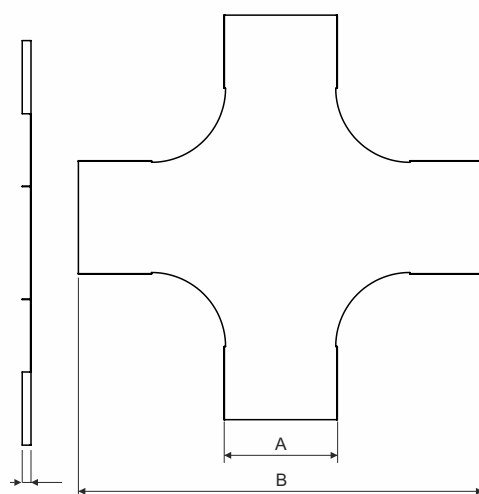


type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
VKR 50_S					0,55	0,28	🔥
VKR 50_F	50	50	453	12	0,80	0,47	🔥
VKR 50_ZM					0,75	0,37	🔥
VKR 75_S	75	75	478	12	0,55	0,38	🔥
VKR 100_S					0,55	0,49	🔥
VKR 100_F	100	100	503	12	0,80	0,82	🔥
VKR 100_ZM					0,75	0,73	🔥
VKR 150_S	150	150	553	12	0,55	0,72	🔥
VKR 150_F					0,80	1,21	🔥
VKR 200_S					0,80	1,41	🔥
VKR 200_F	200	200	603	12	0,80	1,64	🔥
VKR 200_ZM					0,75	1,37	🔥
VKR 300_S					1,00	2,81	🔥
VKR 300_F	300	300	703	12	1,00	3,27	🔥
VKR 300_ZM					1,00	2,81	🔥
VKR 400_S					1,00	4,04	🔥
VKR 400_F	400	400	803	15	1,00	4,68	🔥
VKR 400_ZM					1,00	4,04	🔥
VKR 500_S					1,00	5,40	🔥
VKR 500_F	500	500	903	15	1,00	6,27	🔥
VKR 500_ZM					1,00	5,40	🔥
VKR 600_S	600	600	1003	15	1,00	6,30	🔥
VKR 600_F					1,00	7,30	🔥

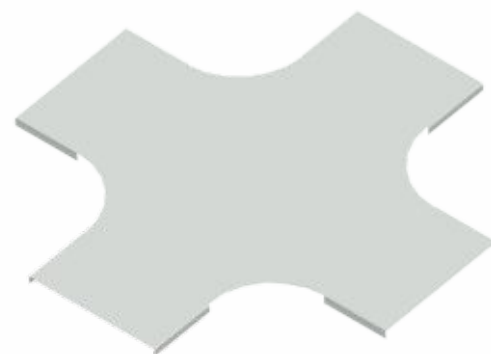

product description:

This cover is used to cover the cross-over.
To fix the cover use 6 pcs of cover fixtures VU or NUV.
These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

psales amount:

1 pc

meets the requirements: ČSN EN 61537:02


classification 🔥:

ČSN 73 0895 P 90-R
DIN 4102-12 E 90
STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage:

ČSN EN 60721-3-1

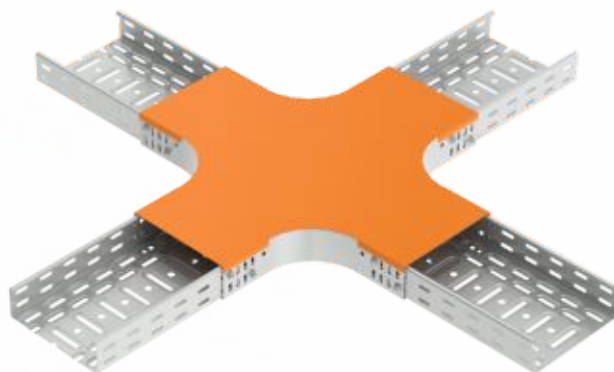

**UPOZORNENIE****Nebezpečie poranenia porezaním**

Napriek tomu, že sú naše výrobky vyrábané s maximálnou snahou o minimalizáciu ostrejších hrán, je na prenášanie, uchopovanie a prácu s prvkami káblového nosného systému nutné vždy používať ochranné pracovné rukavice.

Nebezpečie úrazu elektrickým prúdom

Pretože jednotlivé komponenty káblového nosného systému sú vyrobené z elektricky vodivého materiálu, je bezpodmienečne nutné nepracovať so systémom v blízkosti elektrických častí pod napätím. Nedodržanie bezpečnostných predpisov môže mať za následok ťažkú ujmu na zdraví alebo smrť.

Bezpečné používanie

Pri bežných a predvídateľných podmienkach použitia nepredstavuje žiadne riziká pre spotrebiteľa, pokiaľ je dodržaná správna inštalácia a používanie v súlade s montážnym návodom.

recyklačné symboly:



VKR