


item number	width of cable tray (mm)	height of cable tray (mm)	B (mm)	thickness of metal sheet (mm)
NO 90X50X62_S	62	50	265	0,8
NO 90X50X125_S	125	50	328	0,8
NO 90X50X250_S	250	50	453	1,0
NO 90X100X125_S	125	100	328	0,8
NO 90X100X250_S	250	100	453	1,0
NO 90X100X500_S	500	100	703	1,0
NO 90X50X62_F	62	50	265	0,8
NO 90X50X125_F	125	50	328	0,8
NO 90X50X250_F	250	50	453	1,0
NO 90X100X125_F	125	100	328	0,8
NO 90X100X250_F	250	100	453	1,0
NO 90X100X500_F	500	100	703	1,0

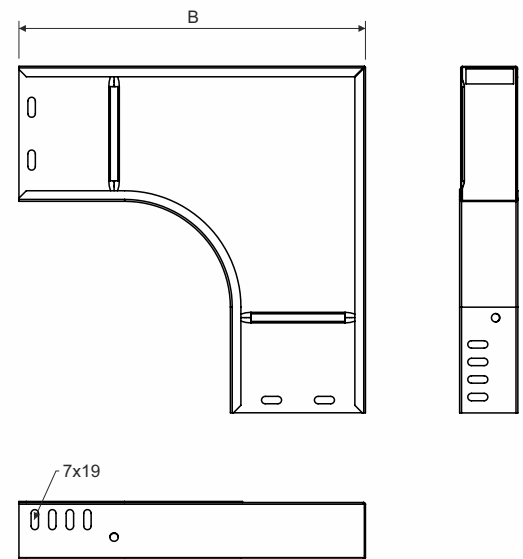

product description: The elbow 90° is used to bend MARS cable trays by 90° in a horizontal direction.
 Use the bolt NSM 6X10 for connection. The bolt head should be inside the cable tray to protect the cables.
 A bolt with a GMT surface finish is used for a tray with an F surface finish.
 Accessories may be covered according to the description given in the Systems with Maintained Functionality during Fires catalogue.

surface finish: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized, zinc-layer 50 - 100 µm
 EO - epoxy paint for indoor environment - paint over the perimeter - 60 µm
 EC - epoxy paint for indoor environment - total paint - 60 µm

sales amount: á 1 pc

certification: EN 61537:02

classification: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: EN 60721-3-1

