

type number	A (mm)	thickness of metal sheet (mm)	weight (kg/pc)
NPR 125_S	148	2,0	0,17
NPR 125_F			0,20
NPR 250_S	273	2,0	0,35
NPR 250_F			0,40
NPR 500_S	523	2,0	0,69
NPR 500_F			0,80



product description:


This clamp support is used as part of a supporting structure for cable trays.

Is designed to be mounted on the NMP assembly profile. The holder must be secured with an NPPVZ catch.

Cable tray attaching to the wall support is carried out by bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in varnished version.

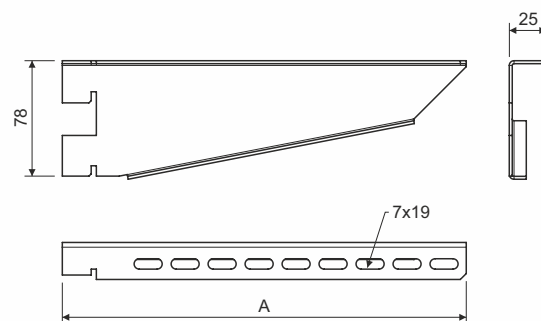

surface finish:

S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45

µm (min. 35 µm)

meets the requirements: ČSN EN 61537:02

sales amount:

1 pc

storage:

ČSN EN 60721-3-1



**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NPR