


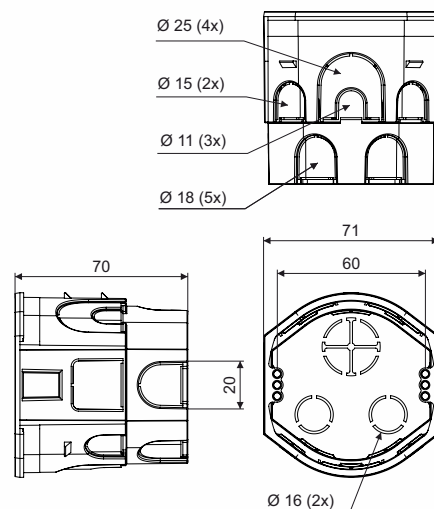

product description:

designed for distribution system with voltage 400 V
easy installation of devices with big depth
possibility to join into and continuous series with and spacing of 71 mm
boxes can be joined with boxes KU 68-45/HF
possibility to easily clamp under the device using screwless terminals
allows to install double-socket
suitable for installations with increased need for protection of persons and property

material: PC-ABS

color: white

self-snuffing: yes, within 30 s

temperature resistance: -5 - +60 °C

flaming loop test: 850 °C

fire class for underlying material: A1-D

weight: 34 g

meets the requirements: EN 60 670-1, EN IEC 60 670-1 ed.2

storage: ČSN 64 0090

KPR 68-70/HF_HA - 8 pcs packed in foil, 48 pcs in carton, instrument screws inserted in package

accessories:

cover V 68HF
blind cover ZV 68
extending frames NR 5X5
screwless terminal plates TYP015, TYP016, TYP017, TYP018

auxiliary tools:

non-hammered masonry cutter FR 68 SDS

recycling symbols:



box



cardboard



screws

WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers